




Built-In Cut Out Dimensions

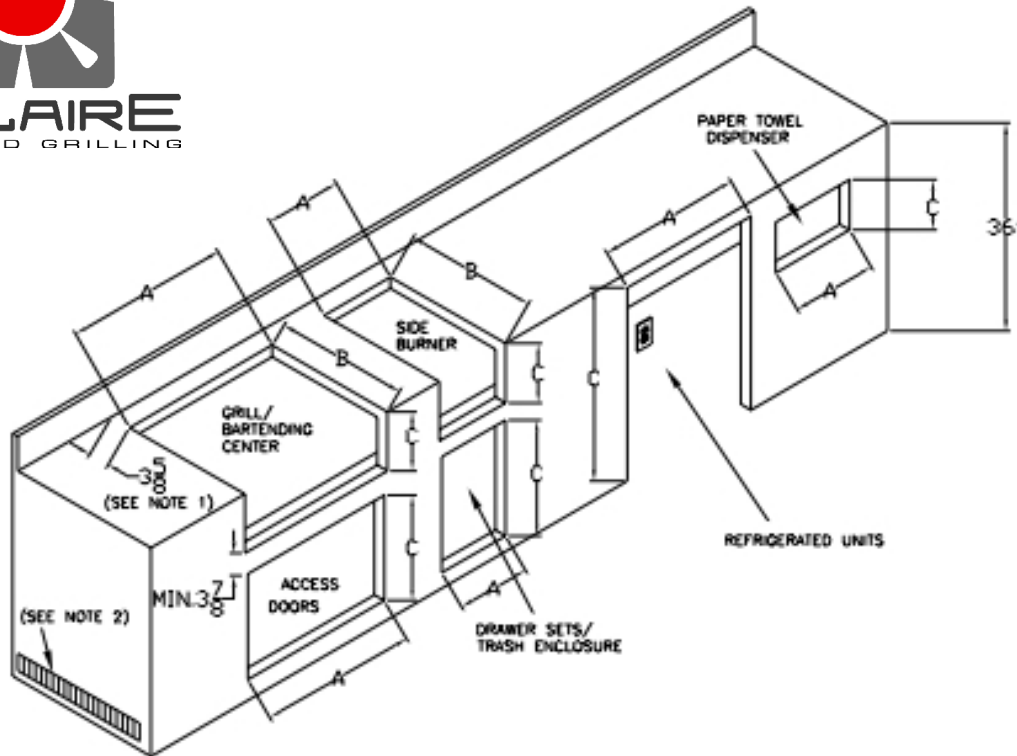

| Model # | Product | Width | | | Depth | | Height | |
|--------------|--------------------------|---------|-----------|----------|-------|--|--------|--|
| | | A | B | C | | | | |
| IRBQ-15 | 15" Grill | 14 1/2" | 16 3/4" | 9 5/8" | | | | |
| IRBQ-21 | 21" Grill | 20" | 16 1/4" | 7 7/8" | | | | |
| IRBQ-21XL | 21XL Grill | 20" | 21" | 7 7/8" | | | | |
| AGBQ-27 | 27" Grill | 26" | 16 1/4" | 8 7/8" | | | | |
| AG/IRBQ-27XL | 27XL Grill | 26" | 21" | 8 7/8" | | | | |
| AG/IRBQ-30 | 30" Grill | 28 1/2" | 23" | 10 1/4" | | | | |
| AG/IRBQ-36 | 36" Grill | 34 1/2" | 23" | 10 1/4" | | | | |
| AG/IRBQ-42 | 42" Grill | 40 1/2" | 23" | 10 1/4" | | | | |
| AGBQ-56 | 56" Grill | 54 1/2" | 23" | 10 1/4" | | | | |
| IRIJ-21 | 21" Insulated Jacket | 25 3/8" | 17 11/16" | 9" | | | | |
| IRIJ-21XL | 21XL Insulated Jacket | 25 3/8" | 22 9/16" | 9" | | | | |
| IRIJ-27 | 27" Insulated Jacket | 31 3/8" | 17 11/16" | 10" | | | | |
| IRIJ-27XL | 27XL Insulated Jacket | 31 3/8" | 22 9/16" | 10" | | | | |
| IRIJ-30 | 30" Insulated Jacket | 34 1/2" | 24 1/2" | 11 1/4" | | | | |
| IRIJ-36 | 36" Insulated Jacket | 40 1/2" | 24 1/2" | 11 1/4" | | | | |
| IRIJ-42 | 42" Insulated Jacket | 46 1/2" | 24 1/2" | 11 1/4" | | | | |
| IRIJ-56 | 56" Insulated Jacket | 60 1/2" | 24 1/2" | 11 1/4" | | | | |
| IRDT-24 | Bartending Center | 23 1/4" | 23" | 10 1/4" | | | | |
| IRDT-30 | Bartending Center | 28 1/2" | 23" | 10 1/4" | | | | |
| SSB-14 | Single Side Burner | 13 1/4" | 13 1/4" | 9" | | | | |
| IRSB-14 | Dual Side Burner | 13 1/4" | 23" | 10 1/4" | | | | |
| SPR7-OS | Refrigerator | 24 1/2" | 26" | 34" | | | | |
| SP6DS-2D-OS | 2 Drawer Refrigerator | 24 1/2" | 26" | 34" | | | | |
| SP6DS-3D-OS | 3 Drawer Refrigerator | 24 1/2" | 26" | 34" | | | | |
| SBC-490-OS | Refrigerated Beer Cooler | 24 1/2" | 26" | 35" | | | | |
| FMD/IRAD-21 | 21" Door | 18 1/4" | - | 18 1/4" | | | | |
| FMD/IRAD-30 | 30" Doors | 27 1/4" | - | 18 1/4" | | | | |
| FMD/IRAD-36 | 36" Doors | 33 1/4" | - | 18 1/4" | | | | |
| FMD/IRAD-42 | 42" Doors | 39 1/4" | - | 18 1/4" | | | | |
| UD26S | Single Drawer - Shallow | 27 1/8" | 15" | 3 11/16" | | | | |

| | | | | |
|-------|---------------------------|---------|-----|----------|
| UD26D | Single Drawer – Deep | 27 1/8" | 23" | 3 11/16" |
| 2D14S | 2 Drawer Narrow - Shallow | 12 7/8" | 15" | 20 1/16" |
| 2D14D | 2 Drawer Narrow - Deep | 12 7/8" | 23" | 20 1/16" |
| 2D21S | 2 Drawer Wide – Shallow | 19 7/8" | 15" | 20 1/16" |
| 2D21D | 2 Drawer Wide – Deep | 19 7/8" | 23" | 20 1/16" |
| 3D14S | 3 Drawer Narrow – Shallow | 12 7/8" | 15" | 20 1/16" |
| 3D14D | 3 Drawer Narrow – Deep | 12 7/8" | 23" | 20 1/16" |
| 3D21S | 3 Drawer Wide – Shallow | 19 7/8" | 15" | 20 1/16" |
| 3D21D | 3 Drawer Wide – Deep | 19 7/8" | 23" | 20 1/16" |
| PTH1 | Paper Towel Holder | 14 7/8" | 8" | 8 3/4" |
| TRE1 | Trash Enclosure | 12 7/8" | 19" | 20 1/16" |

Note 1: Min. 3 5/8" clearance required between edge of cutout and inside back wall of enclosure for gas regulator.

Note 2: Ventilation of island should be in accordance with local codes or accepted practice.


SPECIAL NOTE: Grill installation into combustible enclosure

requires insulated jacket. Order part #SOL-IRIJ-XX, where "XX" is the size of the grill in inches.

NATURAL GAS SUPPLY NOTE: A standard 3/8" ID flexible natural gas supply hose has a maximum capacity of 60,000 BTUs and should be used with 27" and 30" grills only. A 1/2" ID natural gas supply hose is required for larger models, or for 30" grills with a side burner. The proper hose is available from Solaire, order part #SOL-12HOSE12.

Detail for Flush Mounting

If the countertop of your island overhangs the cabinet face, the countertop must be notched to accommodate the control panel or front of the Solaire equipment.

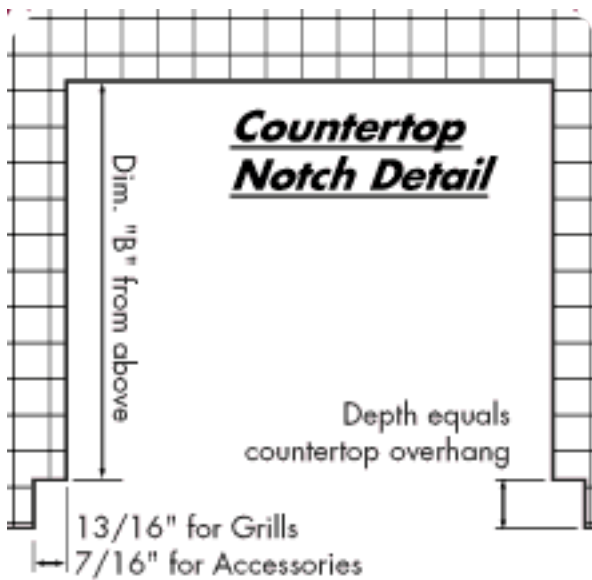

Rasmussen Iron Works, Inc.

12028 E. Philadelphia St. Whittier, CA 90601 U.S.A.
 (562) 696-8718 FAX: (562) 698-3510
 info@rasmussen.biz www.rasmussen.biz

Quality Products Since 1907